


ATS Series

3R-CCN

(1 x 24159506 + 2 x 24159505 = 1 set)

Product # a	Product # b
1 pcs ATS Series 12 x C13 (24159506) Drawing – please see page 2	2 pcs Power cables to ATS series C19 to Commando (IEC60309) plug/male, 16Amps, 8 meter long (<i>halogen free</i>) cable (24159505)


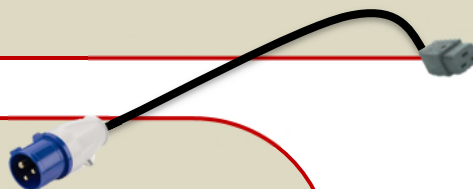


Features:

- ✓ **ATS Series**
 - ATS + 2 green LED
- ✓ **Input**
 - 250VAC 16A 50Hz
 - 2 x C20 Receptacle
(with Cable Retainer installed)
- ✓ **Output**
 - 12 x IEC C13 Socket (10A rated)
- ✓ **Operating Temperature**
 - 0° to 60°C
- ✓ **Mounting Accessories**
 - 2 x Metal Bracket

Copyright 2016 - RETEX

RoHS Compliant

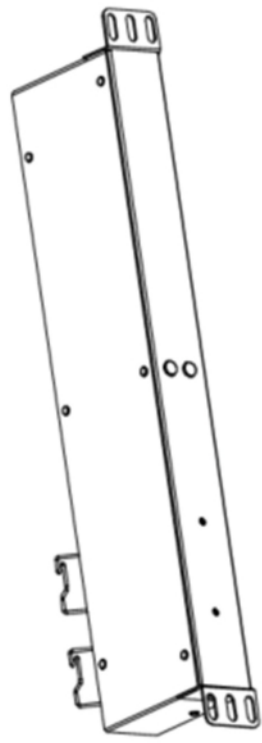

Label Design :

Product Number: 24159506
 Revision: R1B
 Serial Number: 3PRTX00001-3PRTX00005
 Functional Designation: ATS 12C13



3R-CCN

ATS Series ATS + 2 Green LED	OUTPUT (12) IEC13 Socket (10A Rated)	OPERATING TEMPERATURE 0° to 60°C
INPUT 250VAC 16A 50HZ (2) C20 Receptacle (With Cable Retainer Installed)	BRANCH CIRCUITS (NONE)	MOUNTING ACCESSORIES (2) Metal Bracket




 PART NUMBER: 24159506 UNIT:mm TECHNICAL STANDARD: 1. IFC BUSINESS 2. NO FLAW ON THE SURFACE 3. NO FLAW ON THE SURFACE	24159506 Steel=1.5mm Black Powder coating
FILLET R0.5 ANGLE 30.5° FIRST ANGLE SCALE 1:3	Housing DATE 21-07-2016

Revisions		
Rev	Description	Date

Dealer:
 Tre Röda AB
 Tuljgatan 5
 SE-749 49 ENDRING - SWEDEN
 Phone: +46 (0) 8 560 200 22
 e-mail: info@trodaba.se
 http: www.trodaba.se

3R-UE

(1 x 24159226 + 2 x 24159504 + 8 x 24159503 + 2 x 24159502 = 1 set)

Product # A	Product # B	Product # C	Product # D
<p>1 pcs ATS Series (24159226)</p> <p>Drawing, please see page 4</p>	<p>2 pcs Power cable to ATS Series C19 to Commando (IEC60309) plug/male, 16Amps, 4 meter long (halogen free) cable (24159504)</p>	<p>8 pcs C14 male plug for screw connection (250V / 16A) (24159503)</p>	<p>2 pcs C19 female plug for screw connection (250V / 16A) (24159502)</p>
			



Features:

- ✓ **ATS Series**
 - ATS + 2 green LED
- ✓ **Input**
 - 250VAC 16A 50Hz
 - 2 x C20 Receptacle
(with Cable Retainer installed)
- ✓ **Output**
 - 8 x IEC C13 Socket (10A rated)
 - 1 x C19 Receptacle (16A rated)
(with Cable Retainer installed)
- ✓ **Operating Temperature**
 - 0° to 60°C
- ✓ **Mounting Accessories**
 - 2 x Metal Bracket

RoHS Compliant

Copyright 2016 - RETEX

483

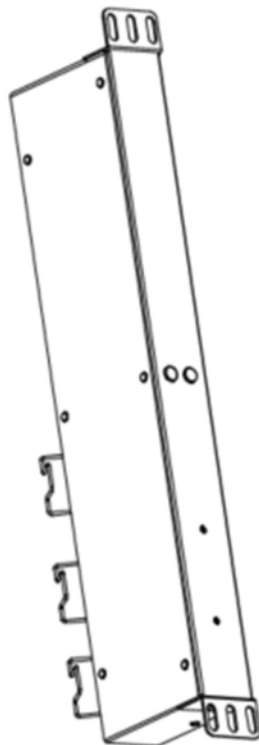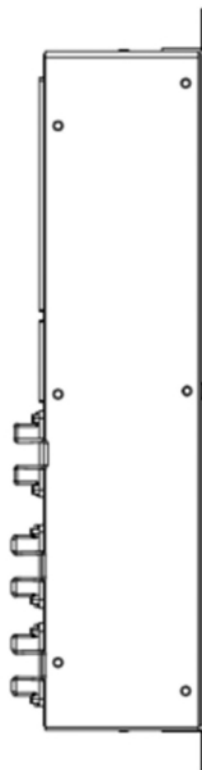

Label Design :

Product Number: 24159226
 Revision: R1B
 Serial Number: SPRTX00001-SPRTX00005
 Functional Designation: ATS BC13>1C19



 unit:mm TECHNICAL STANDARD 1.FIT: 2.2ND RUSTINESS 3.2ND FLAW ON THE SURFACE	24159226 Aluminium Black Powder coating
FILLET R0.5 ANGLE ±0.5° FIRST ANGLE	Housing DATE 21-07-2016
SCALE 1:3	

Rev	Description	Date

ATS Series ATS * 2 Green LED	OUTPUT (8) IEC13 Socket (10A Rated) (1) C19 Receptacle (16A Rated) (With Cable Retainer Installed)	OPERATING TEMPERATURE 0° to 60°C
INPUT 250VAC 16A 50HZ (2) C20 Receptacle (With Cable Retainer Installed)	BRANCH CIRCUITS (NONE)	MOUNTING ACCESSORIES (2) Metal Bracket

Distributor:
 Tre Roda AB
 Fullgrann 5
 SE-719 93 ENKÖPING - SWEDEN
 Phone: +46 (0) 8 560 300 22
 e-mail: info@trodan.se
 http: www.trodan.se